


sd VC Verification 3

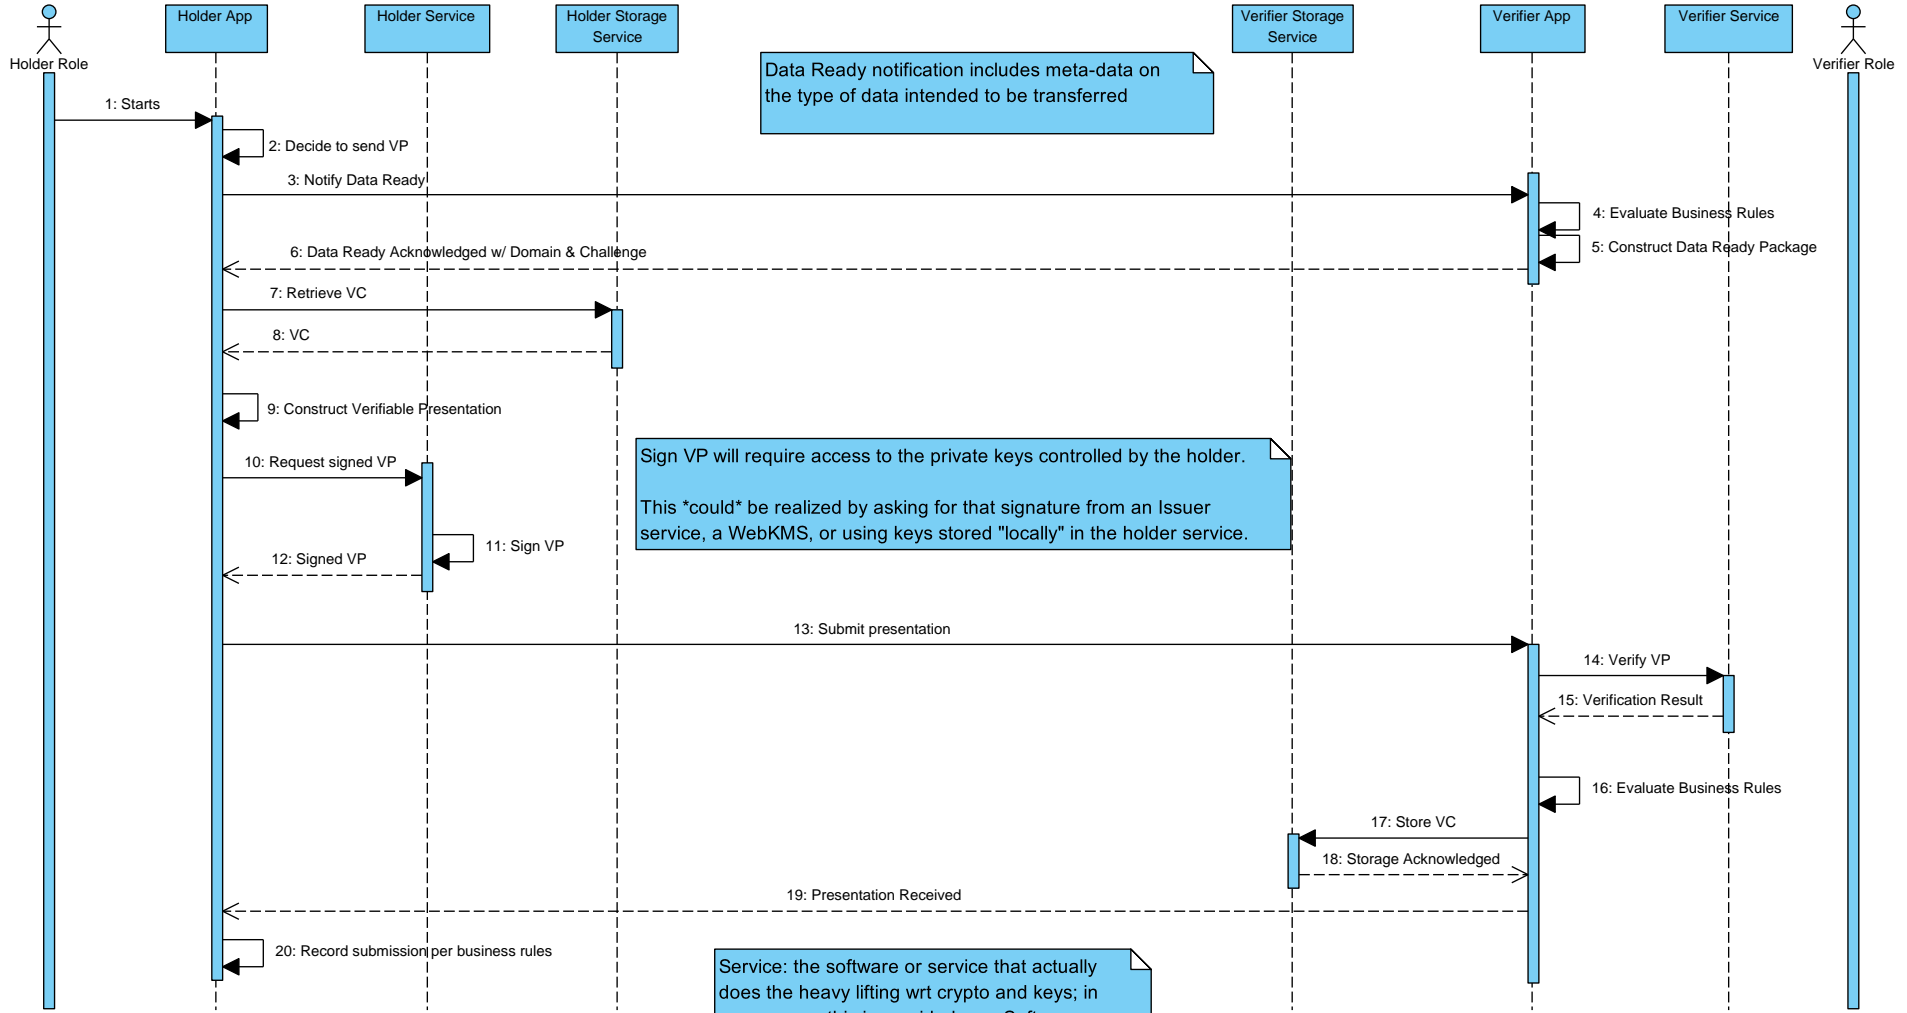

Data Ready notification includes meta-data on the type of data intended to be transferred

Sign VP will require access to the private keys controlled by the holder.
 This *could* be realized by asking for that signature from an Issuer service, a WebKMS, or using keys stored "locally" in the holder service.

Service: the software or service that actually does the heavy lifting wrt crypto and keys; in many cases this is provided as a Software as a Service architecture.
 App: the app that uses the service to realize particular business rules for particular users. This might be a mobile app, a web app, or a networked service exposed via API over the internet. The app may or may not have a user-