

CSS Regions 101

Rossen Atanassov | Microsoft Corporation


Agenda

- What is a region?
- What is not in scope of regions module?
- Questions

What is a region?

- Element (explicit or pseudo) that is able to receive and output content from other elements (explicit or generated) or external document – **Named Flow**
- **Fragmenter** (as in CSS3 Fragmentation) - boxes produced by a regions are able to fragment their content
 - Fragmentation is controlled by the '**region-break**' property
- Regions are able to add visual styling to their fragmented content
 - Only properties that apply to first-line, but not structural ones such as position, display, float etc.

Regions example

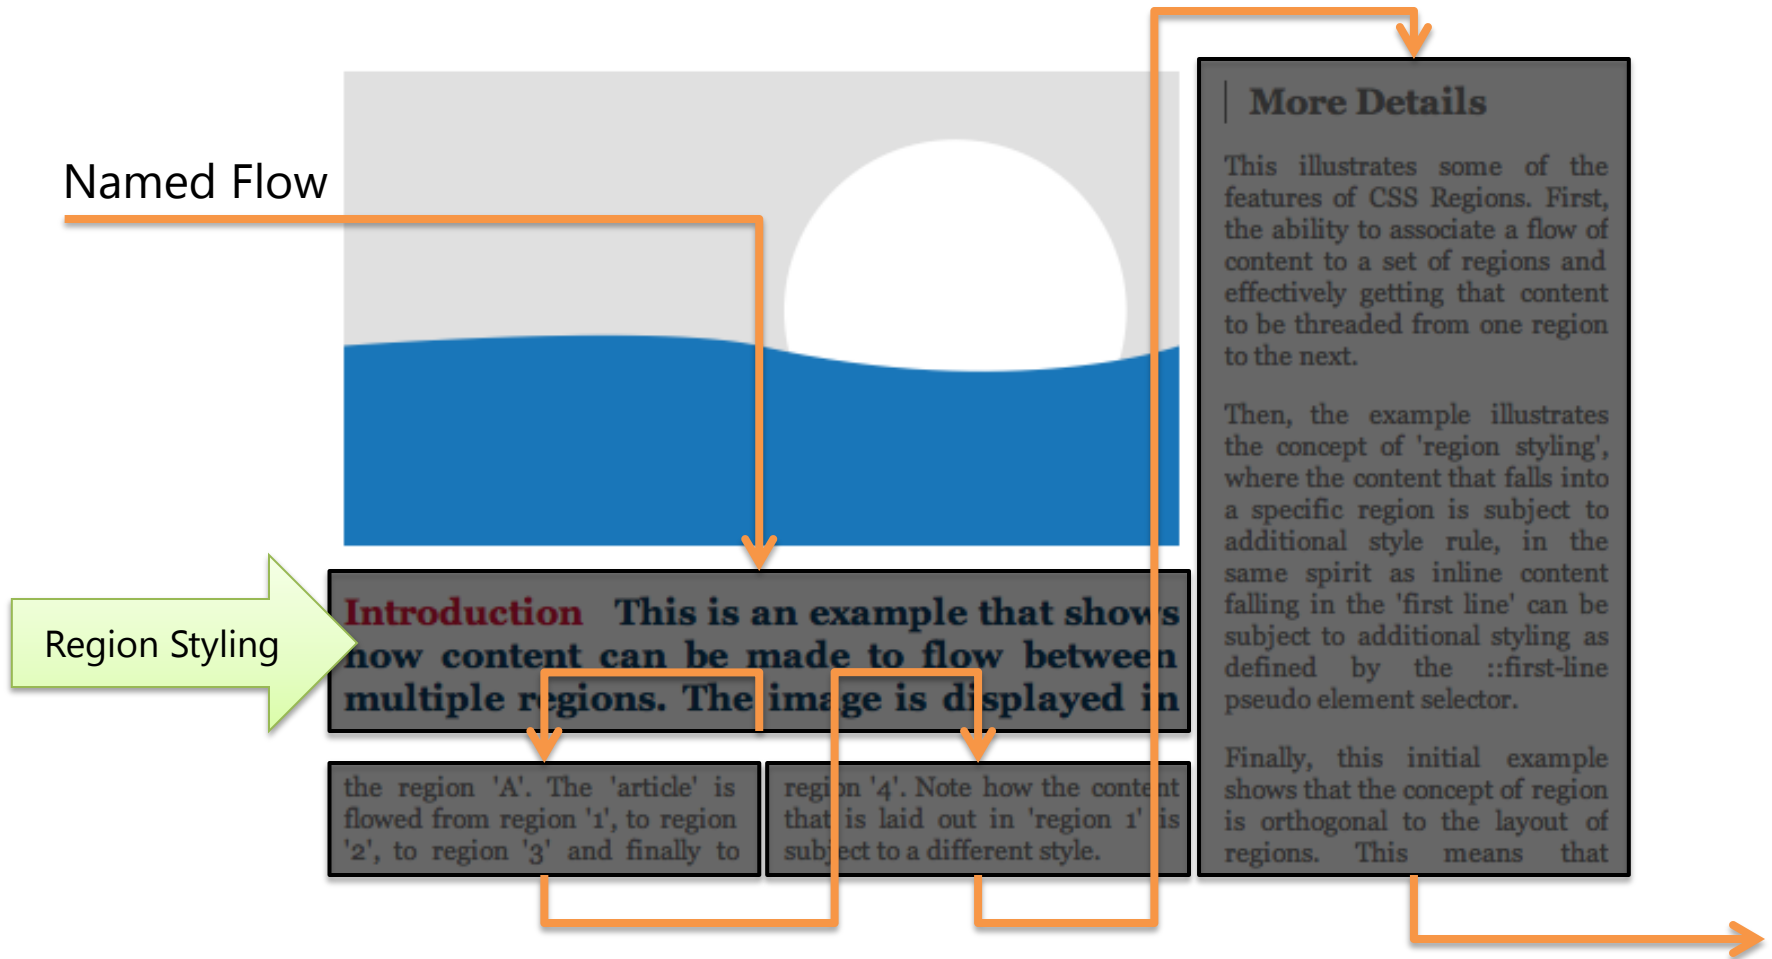

What is not in scope of regions module?

- Breaking rules – content that breaks between regions follows the rules specified in CSS3 Fragmentation module
 - Explicit breaks, widows, orphans etc. are not specific to regions but apply to their fragmented content (this same is true for print and multicolumn)
- Auto-generation, conditional generation or grouping of regions – separate topic that should be covered by CSS3 Page Templates module

Questions